

CHARACTER:

1. Physical performance

- a、Excellent mechanical properties
- b、Excellent thermal stability
- c、Low temperature soft good performance
- d、Good flame retardancy
- e、Of high resistance to chemicals
- f、Chemistry stability is good
- b、Good resistance to high temperature of the engine fluid
- j、Excellent resistance to impact ability

2. Electrical Properties

- a、Electrical insulation good
- b、Good the dielectric properties

3. Processing properties

- a、Using the hot extrusion processing
- b、Can be twisted pair and multi-core
- c、Good processing properties Harness
- d、Harness processing process good compatibility
- e、According to SAE standard design

4. Environmental protection

- a、ROHS/REACH compliant


SHOULD BE USED:

Ground vehicles with low voltage electric system primary cable

REFERENCE:

SAE J1128-2000

Outline:

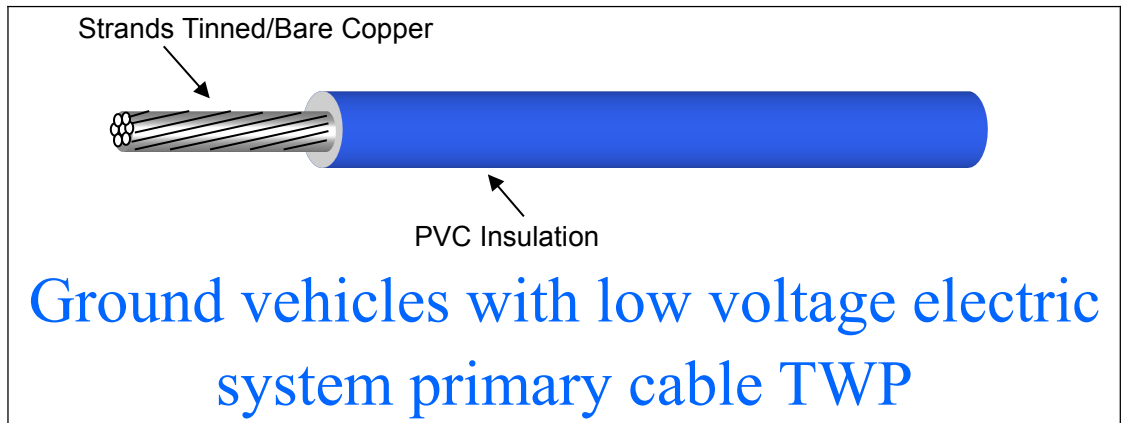

Wire structure description:
 Conductor: Tinned /Bare copper ;
 Insulation materials: PVC Insulation

Ground vehicles with low voltage electric system primary cable
 Rated temperature: 80°C rated voltage: 60Vdc or 25Vac

STYLE	AWG	Conductor size (No./ mm) ±0.005mm	Conductor Dia.(mm)	insulation thickness (mm)		Overall diameter (mm)
				Nom.	Min.	
TWP	8	168/0.254	3.80	0.55	0.39	4.90±0.15
	10	105/0.254	3.00	0.50	0.35	4.00±0.15
	12	65/0.254	2.36	0.45	0.32	3.26±0.15
	14	41/0.254	1.88	0.40	0.28	2.68±0.10
	16	19/0.30	1.50	0.40	0.28	2.30±0.10
	16	26/0.254	1.50	0.40	0.28	2.30±0.10
	18	16/0.254	1.18	0.40	0.28	1.98±0.10
	20	7/0.32	0.98	0.40	0.28	1.78±0.10
	22	7/0.254	0.78	0.40	0.28	1.58±0.10
	24	7/0.20	0.61	0.40	0.28	1.40±0.10

Marking: NO MARKING

SAE COLOR SERIES

* STOCK COLOR CHART				
00-BLACK	01-WHITE	02-RED	03-YELLOW	04-GREEN
05-BLUE	06-BROWN	07-GREY	08-ORANGE	09- VIOLET

PACKAGE

*PACKAGE				
Part No.	Packing- Ft/roll			3F
8~10AWG	■ 500FT	□ 1000FT	□ 2000FT	
12~16AWG	□ 500FT	■ 1000FT	□ 2000FT	
18~24AWG	□ 500FT	□ 1000FT	■ 2000FT	

According to customer requirements for packaging packaging